
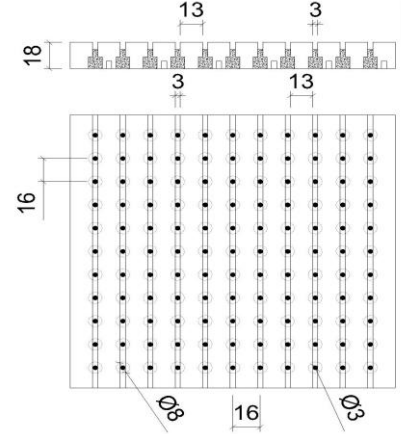


PRODUCT DEFINITION:

Acoustic panel with grooves on wieved face and holes at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

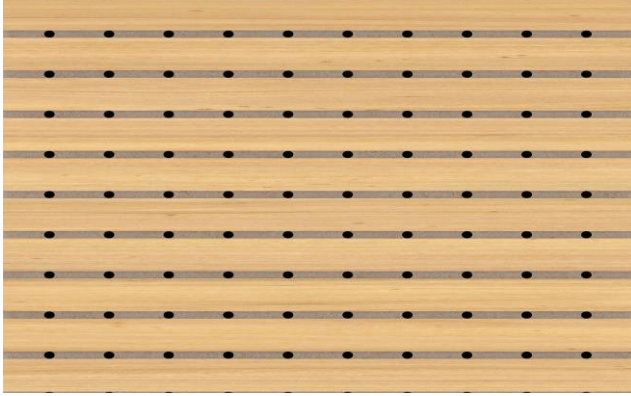

| FREQUENCY(HZ) | | 100 | 125 | 160 | 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1000 | 1250 | 1600 | 2000 | 2500 | 3150 | 4000 | 5000 |
|------------------------------|----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| SOUND ABSORPTION COEFFICIENT | Without Mineral Wool | 0,35 | 0,52 | 0,63 | 0,62 | 0,71 | 0,67 | 0,68 | 0,59 | 0,49 | 0,38 | 0,34 | 0,34 | 0,31 | 0,32 | 0,29 | 0,26 | 0,25 | 0,27 |
| | With Mineral Wool | 0,59 | 0,64 | 0,65 | 0,74 | 0,74 | 0,71 | 0,70 | 0,62 | 0,57 | 0,50 | 0,43 | 0,35 | 0,32 | 0,30 | 0,27 | 0,25 | 0,23 | 0,24 |


ACOUSTIC FEATURES:

| | |
|-------------------------------|-------|
| Distance Between Grooves (mm) | 13 |
| Width Of Groove (mm) | 3 |
| Depth Of Groove (mm) | 6 |
| Diameter Of Hole (mm) | 3/8 |
| Pitch Of Hole (mm) | 16x16 |
| Depth Of Hole (mm) | 15 |
| Perforated Area (%) | 23 |

ACOUSTIC VALUES

| | | |
|-----------------------------|------------|-------------------|
| Mounting Depth 200mm | NRC | Euro Class |
| Without Mineral Wool | 0,50 | D |
| With Mineral Wool | 0,55 | D |
| Mineral Wool | 50 mm | 50 kg/m3 |

Absorption according to EN ISO 354

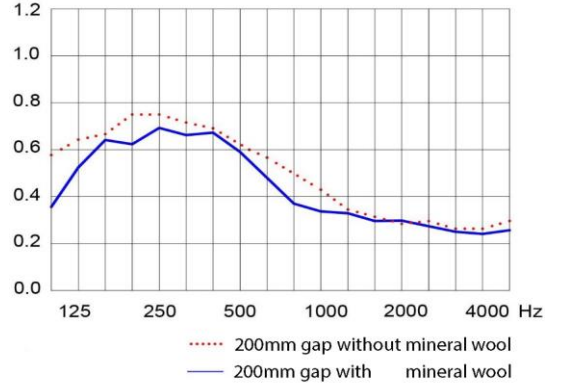

GENERAL FEATURES:

| | |
|--------------------|--|
| Materials | MDF Standart D-s2.d0 MDF Fireproof B-s2.d0 |
| Thickness (mm) | 18mm (MDF) For other materials and thicknesses, please contact with PERFOPAN |
| Approximate Weight | 13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fireproof MDF |
| Finishing | Melamine Wood Veneered High Pressure Laminate (HPL) Varnished Lacquered to RAL Chart |

Sizes

| Aliminium Profile | FR Class | D Class |
|-------------------|----------|----------------------|
| Melamine | 512x1390 | 512x1390 |
| | 672x1390 | 672x1390 |
| | 512x2780 | 512x2780 |
| | 672x2780 | 672x2780 |
| | | 576x1800 576x3640 |
| HPL | 512x1390 | 512x1390 |
| | 672x1390 | 672x1390 |
| | 512x2780 | 512x2780 |
| | 672x2780 | 672x2780 |
| | | 576x1800 576x3640 |

| Aliminium Profile | FR Class | D Class |
|-------------------|----------|----------------------|
| Veneered | 512x1390 | 512x1390 |
| | 672x1390 | 672x1390 |
| | 512x2780 | 512x2780 |
| | 672x2780 | 672x2780 |
| | | 576x1800 |
| Lacquered | 512x1390 | 512x1390 |
| | 672x1390 | 672x1390 |
| | 512x2780 | 512x2780 |
| | 672x2780 | 672x2780 |
| | | 576x1800 576x3640 |