
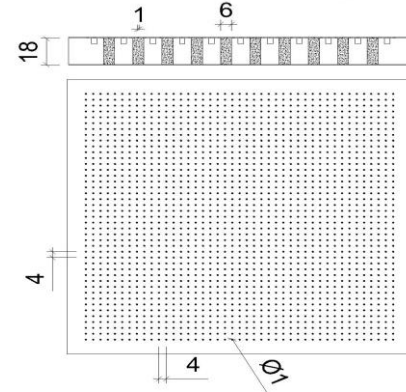


PRODUCT DEFINITION:

Acoustic panel with holes on wieved face and at back side. Soundtex black glass tissue applied to back face. Various color options available on all visible surfaces. Used for interior applicants in general building and civil engineering structures.

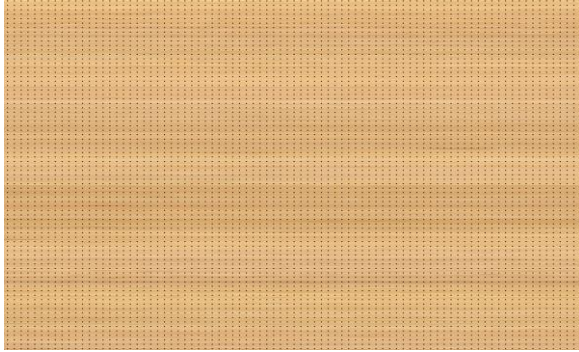


FREQUENCY(HZ)		100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
SOUND ABSORPTION COEFFICIENT	Gap Of 200mm	0.37	0.48	0.61	0.60	0.74	0.80	0.85	0.86	0.76	0.68	0.64	0.66	0.65	0.65	0.68	0.69	0.65	0.68
	Mineral Wool 50mm	0.52	0.63	0.62	0.67	0.75	0.76	0.81	0.80	0.78	0.76	0.77	0.74	0.70	0.67	0.71	0.71	0.73	0.75

ACOUSTIC FEATURES:

Distance Between Holes (mm)	4
Diameter Of Hole (mm)	1/6
Pitch Of Hole (mm)	4x4
Depth Of Hole (mm)	18
Perforated Area (%)	5

Absorption according to EN ISO 354

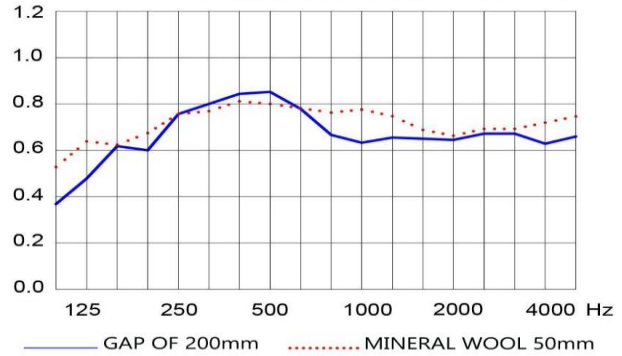

ACOUSTIC VALUES

Mounting Type E-205

	NRC	Euro Class
Mineral Wool 50 mm	0.75	C
Gap Of 200 mm	0.70	C
Mineral Wool	50 mm	50 kg/m3

GENERAL FEATURES:

Materials	MDF Standart D-s2.d0 MDF Fireproof B-s2.d0
Thickness (mm)	18mm (MDF) For other materials and thicknesses, please contact with PERFOPAN
Approximate Weight	13,45 kg/m2 18mm Standart MDF 14,60 kg/m2 18mm Fireproof MDF
Finishing	Melamine Wood Veneered High Pressure Laminate (HPL) Varnished Lacquered to RAL Chart

Sizes

Aluminium Profile	FR Class	D Class
Melamine	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
		576x1800 576x3640
HPL	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
		576x1800 576x3640

Aluminium Profile	FR Class	D Class
Veneered	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
		576x1800 576x3640
Lacquered	512x1390	512x1390
	672x1390	672x1390
	512x2780	512x2780
	672x2780	672x2780
		576x1800 576x3640